

HUSH BEAM



SPECIFICATIONS

Product Weight: 1.5 lbs/SF

Length: 4', 8' Width: 2.75"

Height: 12", 16", 24"



FIRE RATING


Class A per ASTM E-84

COMPOSITION



- 100% Polyethylene Terephthalate (PET)
 - 55% recycled content


ENVIRONMENTAL @ **FACTORS**




- Low VOC Emissions
 - ASTM D5116

INSTALLATION OPTIONS

Product can be installed with your choice of either aircraft cable or threaded rod attachments.

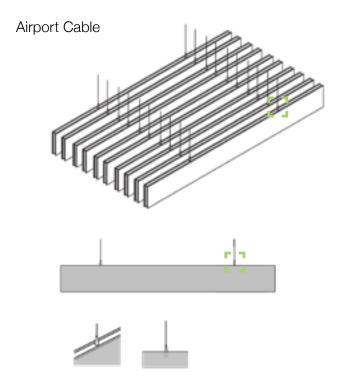

Threaded Rod Attachment



ACOUSTICAL DATA

Based on Baffle size 4' x 2' with Type "J" Mounting. Sabins are based on Sabins per Object, NRC is an equivalent number based on one face of one panel

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
2.75" Thickness	.53	.74	1.06	1.54	1.77	1.94	1.30

Frequency (Hz)	125	250	500	1000	2000	4000	SABINS
2.75" Thickness	2.94	4.45	7.05	10.62	12.61	13.64	

