

SONIC ABSORBER PANEL

A CATALYST ACOUSTICS GROUP BRAND

LAMVIN®



SONIC ABSORBER PANEL

SONIC ABSORBER PANELS core consists of a 6-7 lb. density rigid fiberglass board layered with a 1/8" high density 10-20 lb. fiberglass sheet for added strength and tackability. Resin hardened edges to reinforce panel perimeter against warping and damage. Your chosen finish selection is bonded directly to the panel face with all edges wrapped carefully and completely to the back of the panel to ensure a straight, flat, wrinkle-free surface with tailored corners.

A LARGE VARIETY OF STYLISH FINISHES including fabrics and vinyls are available. See the "Finishes" page on Lamvin.com for a direct link to our recommended suppliers' catalogs which include detailed images of an array of designs. Custom fabrics and printed fabrics are also options. All finishes shall be reviewed for panel stability.


APPLICATIONS:

- Theaters
- Hotels Conference Rooms
- School Music Rooms
- Sound Studios

SPECIFICATIONS:


THICKNESS 1-1/8" | 2-1/8" | 3 1/8"
MAX SIZE 5' x 10'
NRC 1 1/8" .95 | 2 1/8" 1.0 | 3 1/8" 1.2
FIRE TEST ASTM E84-Class I/A

WALL MOUNTING OPTIONS



Z-Clip/Velcro | Z-Clip/Rail/ Velcro


CEILING MOUNTING OPTIONS



Z-Clip/Rail




Impaling Clips w/ Adhesive



Rotofast™ Snap-On Anchor

EDGE OPTIONS

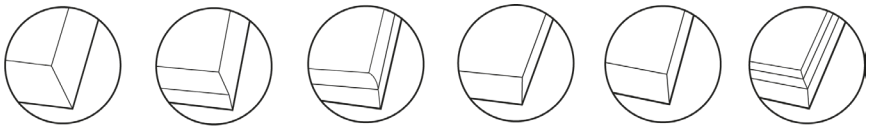

Mitered | Beveled | Radius | Pencil | Square | Tegular

LAMVIN