

HUSH BEAM™

A CATALYST ACOUSTICS GROUP BRAND

LAMVIN®

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

SPECIFICATIONS:

PRODUCT WEIGHT 1.5 lbs/SF

LENGTH 4’, 8’

WIDTH 2.75”

HEIGHT 12”, 16”, 24”


FIRE RATING:

Class A per ASTM E-84, based on 9mm white


INSTALLATION OPTIONS:

Product can be installed with your choice of either aircraft cable or threaded rod attachments.


Aircraft Cable

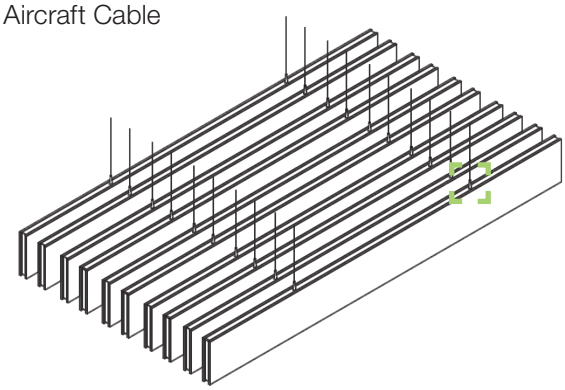






Threaded Rod Attachment

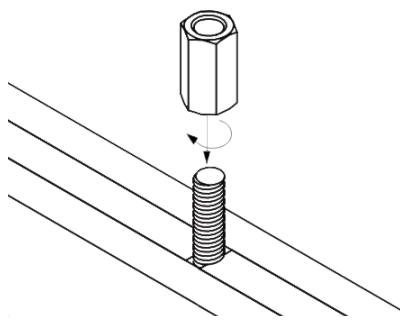



ACOUSTICAL DATA:

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
2.75” Thickness	.53	.74	1.06	1.54	1.77	1.94	1.30

Frequency (Hz)	125	250	500	1000	2000	4000	SABINS
2.75” Thickness	2.94	4.45	7.05	10.62	12.61	13.64	

Based on Baffle size 4’ x 2’ with Type “J” Mounting. Sabins are based on Sabins per Object, NRC is an equivalent number based on one face of one panel.