
HUSH BRIGHT BEAM™
A CATALYST ACOUSTICS GROUP BRAND
LAMVIN®

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

SPECIFICATIONS:

PRODUCT WEIGHT 1.5 lbs/SF

LENGTH 4', 8'

WIDTH 2.75"

HEIGHT 12", 16", 24"

FIRE RATING:

Class A per ASTM E-84

LIGHTING SPECIFICATIONS:

LIGHT WATTAGE 56W

COLOR TEMPURATURE 3000K


LED DIMMABILITY 0-10V

LUMEN 8800

VOLTAGE 120-277V


INSTALLATION OPTIONS:

Aircraft Cable

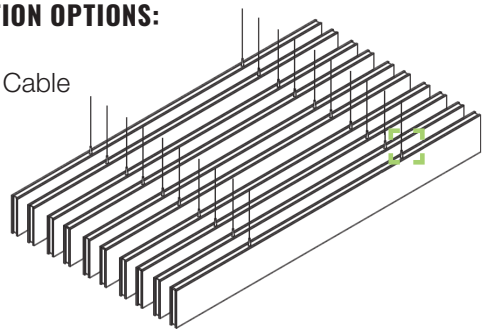


LIGHTING HARDWARE:


Cable kit with:
(2) 6' aircraft cable, (1) 5 wires clear power feed,
(2) white/black/silver canopy



Conduit and Clip

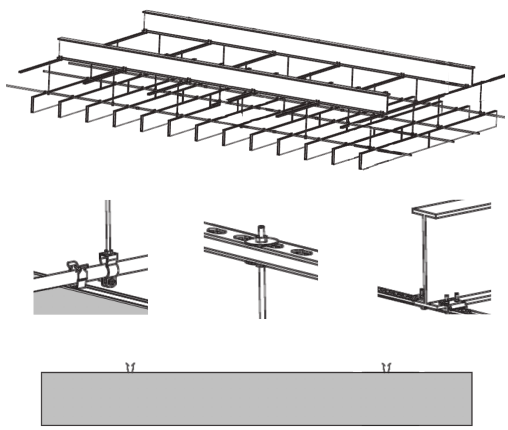

Threaded Rod Attachment

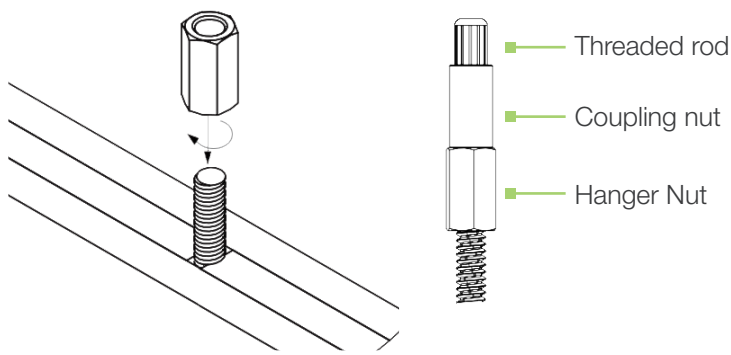

ACOUSTICAL DATA:

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
2.75" Thickness	.53	.74	1.06	1.54	1.77	1.94	1.30

Frequency (Hz)	125	250	500	1000	2000	4000	SABINS
2.75" Thickness	2.94	4.45	7.05	10.62	12.61	13.64	

Based on Baffle size 4' x 2' with Type "J" Mounting. Sabins are based on Sabins per Object, NRC is an equivalent number based on one face of one panel