
HUSHTONE PANEL®
A CATALYST ACOUSTICS GROUP BRAND
LAMVIN®



COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

SPECIFICATIONS:

PANEL SIZES 48” w x 96” h

THICKNESS 9mm or 12mm


WEIGHT .9mm / .27 lb., 12mm / .44 lb.

FIRE RATING:

Class A per ASTM E-84, based on 9mm white

INSTALLATION METHODS:

Construction Panel Adhesive, Carpet Glue or Nail Clips with Adhesive

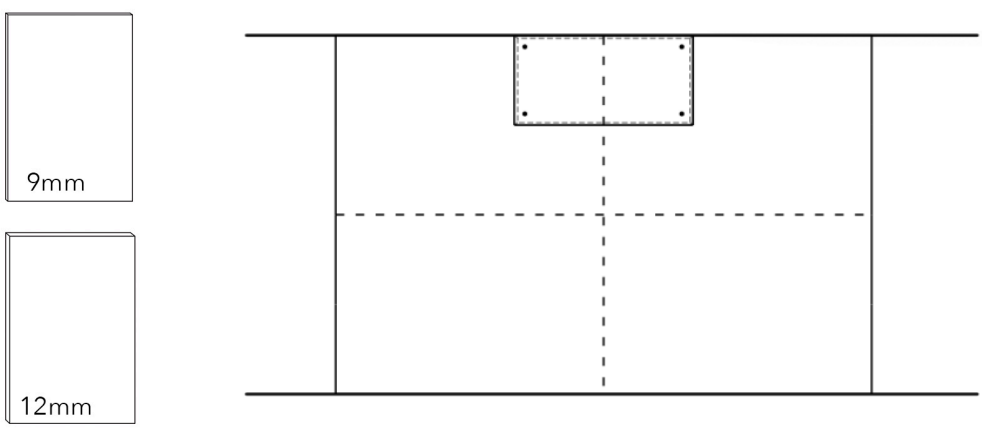

ACOUSTICAL DATA:

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
9mm Thickness	.04	.04	.16	.40	.63	**.82**	**.30**

Tested as Type “A” Mounting

LAMVIN