
HUSHTONE™ HUSH ART SCREEN™


PET | POLYESTER ACOUSTICAL PRODUCTS


(Conduit Clip) Installation Overview

1. Check the existing pipe location and measure the required length needed to hang the panel. (Consult installer or architect for proper measurement.)

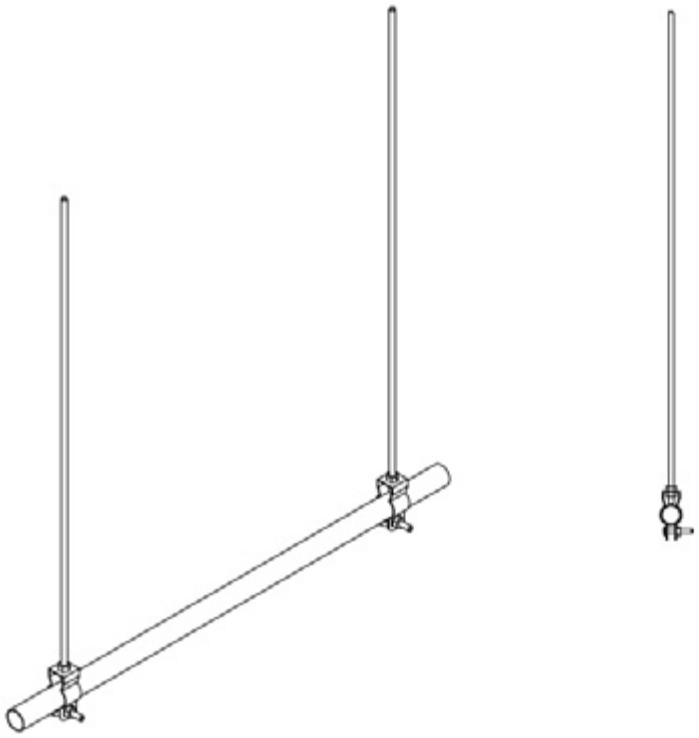

2. Make 1/4” drill for threaded rod assembly.

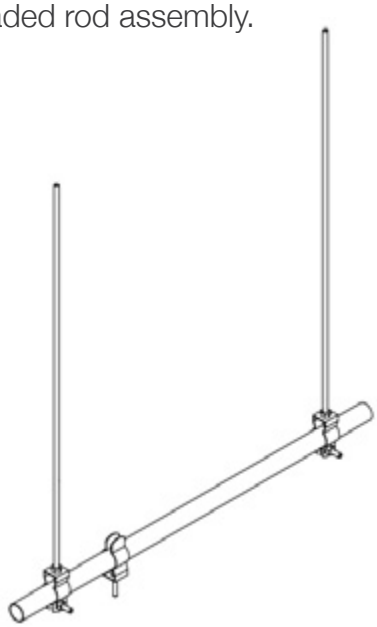

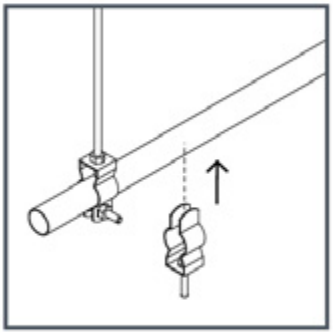

Detail

LAMVIN
ACOUSTICAL PRODUCTS MANUFACTURER

HUSHTONE™ HUSH ART SCREEN™

PET | POLYESTER ACOUSTICAL PRODUCTS

(Conduit Clip) Installation Overview

5.. Insert the threaded rod to the pre-drilled location of side panel assembly extrusion.

