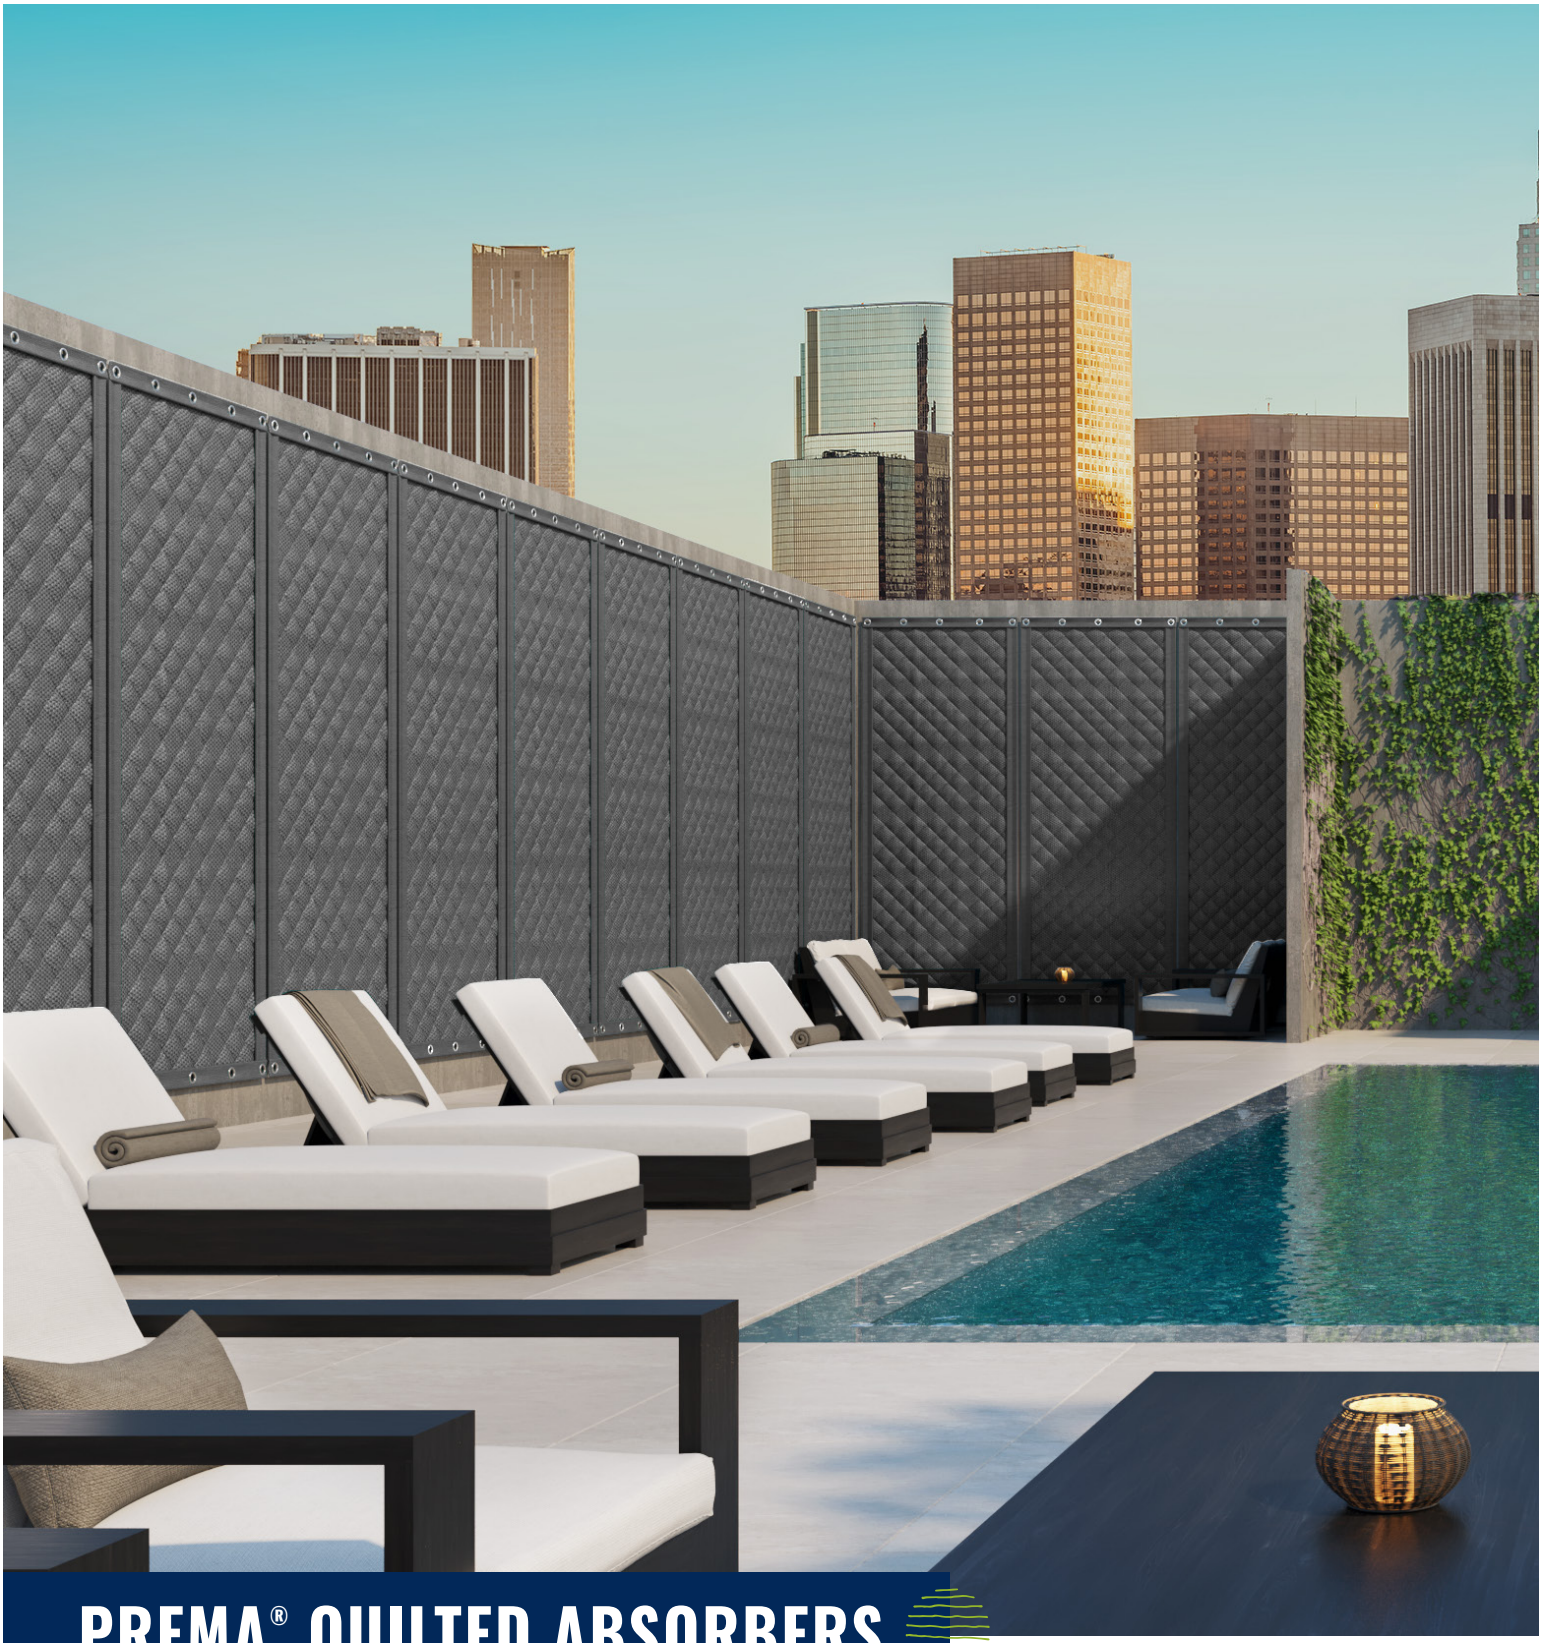


PREMA® QUILTED ABSORBERS

PREMA QUILTED ABSORBERS feature an exterior grade, UV-resistant heavy-duty vinyl-coated polyester (VCP) facing on 2” thick quilted fiberglass with a scrim backing. Modular panels are constructed with grommets across the top and bottom and are sewn with an exterior grade thread, making them a perfect noise control solution around pools and more.

PREMA® QUILTED ABSORBERS

FEATURES

- Excellent acoustical performance
- Easy to install
- Durable, tear and abrasion-resistant
- Great UV and mildew resistance
- Highly water repellent
- Dimensionally stable; will not sag or stretch over time
- Light weight

INDOOR/OUTDOOR APPLICATIONS

- Installed over fencing or on brick or masonry walls of buildings
- Enclosing swimming pools, recreational areas and building systems including HVAC equipment, dust collectors or similar where UV resistance is required
- Life span of 10 years in the harshest exterior environments when properly installed
- Wind rated up to 140mph

TEMPERATURE RANGE

-20° to +180°F

SIZING

- Standard sizes: 48” x 96”, 48” x 120”
- Custom sizes available
- Rolls are available 48” wide x 25’ long, bound or unbound

MATERIAL/THICKNESS/SUBSTRATES

- 8oz Acrylic Polyester Fabric
- Standard thickness: 2”, 1.5 PCF fiberglass core (pre-sewn)
- ACPC facing
- Total weight of product: 0.5# per square foot

MOUNTING OPTIONS

Stainless steel grommets

FIRE RATING

- Class B Flammability Rated per ASTM E- 84
- Flame Spread: 30
- Smoke density: 250

FINISHES

- Exterior grade facing
- Stitched with TENARA® thread
- 12 colors available

ACOUSTICAL PERFORMANCE

1/3 Octave Sound Absorption Coefficients at the Octave Band Frequencies							
Frequency (Hz)	125	250	500	1K	2K	4K	NRC
2” Thickness	0.13	0.84	0.92	0.65	0.45	0.30	0.70