

SONIC ULTRA HIGH-IMPACT PANEL

A CATALYST ACOUSTICS GROUP BRAND

LAMVIN



SONIC ULTRA HIGH-IMPACT PANEL


SONIC ULTRA HIGH-IMPACT PANELS core consists of a 6-7 lb. density rigid fiberglass with a 1/16″ perforated co-polymer plastic face consisting of 3/32″ diameter holes on 5/32″ staggered centers with 33% open area for sound absorption. (Custom perforations available). Resined hardened edges to reinforce panel perimeter against warping and damage. Your chosen finish selection is bonded directly to the panel face with all edges wrapped carefully and completely to the back of the panel to ensure a straight, flat, wrinkle-free surface with tailored corners.

A LARGE VARIETY OF STYLISH FINISHES including fabrics and vinyls are available. See the “Finishes” page on Lamvin.com for a direct link to our recommended suppliers’ catalogs which include detailed images of an array of designs. Custom fabrics and printed fabrics are also options. All finishes shall be reviewed for panel stability.

APPLICATIONS:

- Schools
- Gyms
- Any place you need durable acoustical absorption

MOUNTING OPTIONS

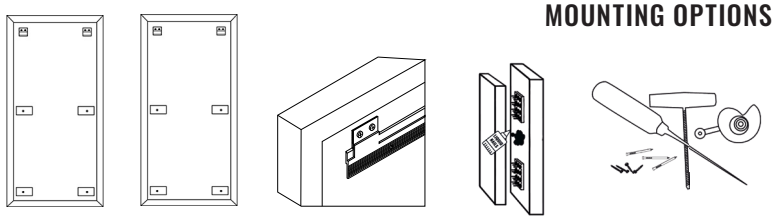


Z-Clip/Velcro | Z-Clip/Rail/ Velcro | Z-Clip/Rail | Impaling Clips w/ Adhesive | Roto Fasteners

SPECIFICATIONS:

THICKNESS 1 1/16” | 1 9/16” | 2 1/16”
CUSTOM SHAPES MAX SIZE 5’ X 10’
NRC 1 1/16” 0.90 | 2 1/16” 1.10
FIRE TEST ASTM E84-Class I/A

EDGE OPTIONS

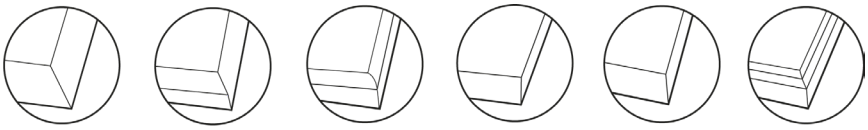

Mitered | Beveled | Radius | Pencil | Square | Tegular

LAMVIN