


A CATALYST ACOUSTICS GROUP COMPANY

LAMVIN®

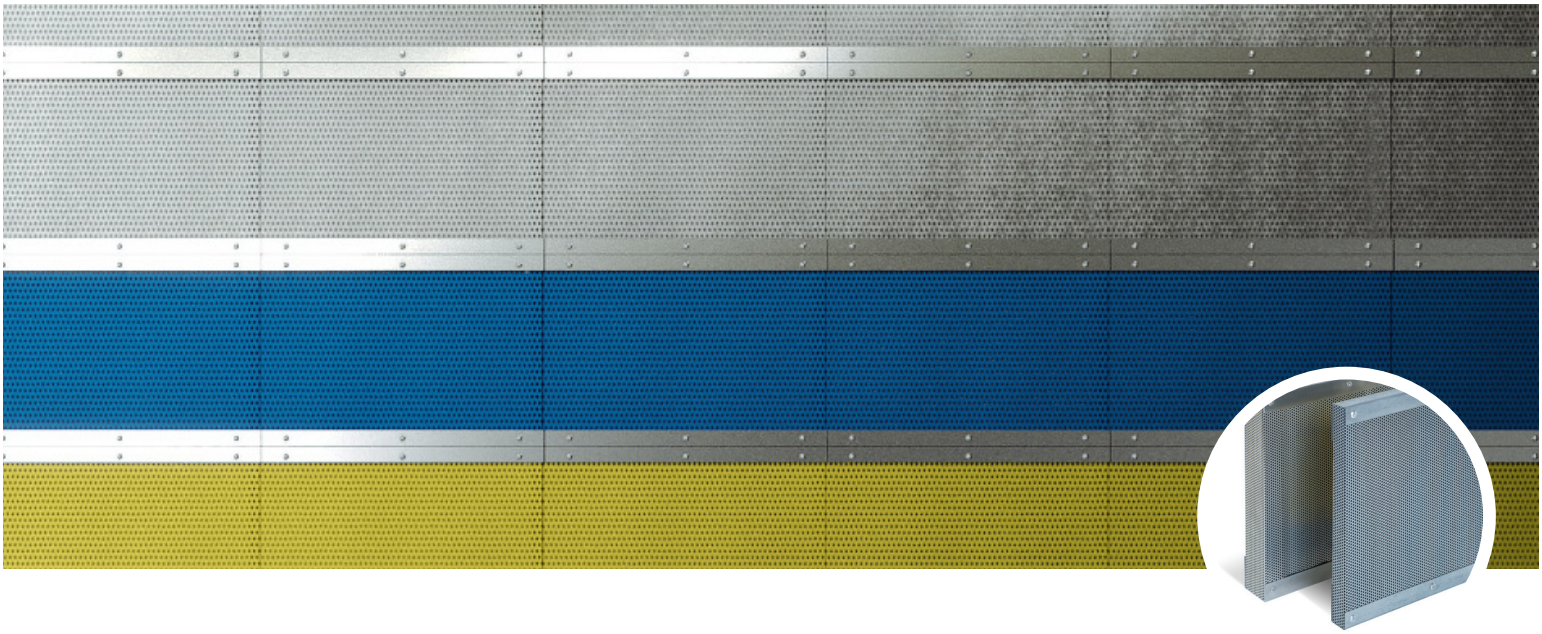

SOUND SUCKER PANEL®

SOUND SUCKER PANELS are specifically designed for the harshest environments. With strong galvanized facing the Sound Sucker Metal Acoustical Panel provides industrial sound solutions for machine and equipment rooms, where noise control is more then aesthetic comfort, but essential to safety.

The a acoustical core consists of 6-7 lb. density, rigid fiberglass board. Metal facing 18 - 24 gauge G-90 Galvanized .032 aluminum / stainless steel. Available in flat face. Perforations 3/32” diameter on 5/32” staggered centers, 33% open area (custom perforations available).

METAL PERFORATED FACE. Natural metal or powder coat finish in a variety of colors are also available.


APPLICATIONS:

- Factories
- Jails
- Warehouses


SPECIFICATIONS:

THICKNESS 2” (custom sizes available)
CUSTOM SHAPES MAX SIZE 42” to 120”
NRC 2” | 1.0
FIRE TEST ASTM E84-Class I/A

WALL MOUNTING OPTIONS

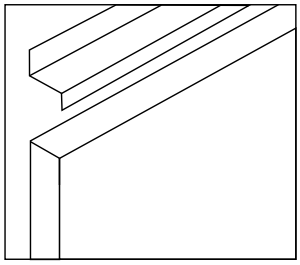


Top Z Mold

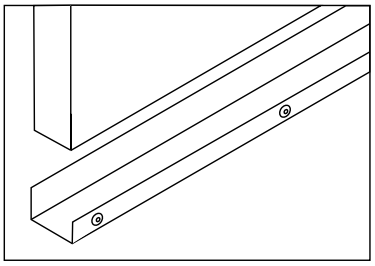


Bottom J Mold

CEILING MOUNTING OPTIONS

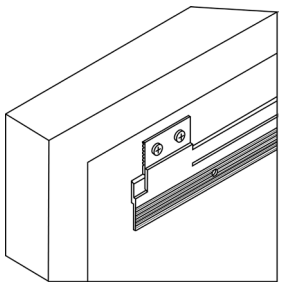

Z-Clip/Z-Rail

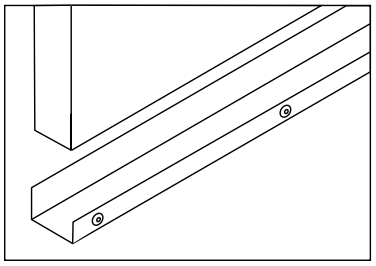

Top and Bottom J Mold

LAMVIN®