

HUSHTONE™ HUSH HEX™

PET | POLYESTER ACOUSTICAL PRODUCTS

HUSH HEX™ Installation Overview

These installation suggestions consist of a common process for HUSH HEX installation. Installers should rely upon their own professional experience and understanding of their unique requirements to ensure a successful installation professional experience and understanding of their unique requirements to ensure a successful install.

Tools Needed




Level



Putty Knife




Construction Adhesive*



Straight Edge


*Liquid Nails (heavy duty) or Robert 3095 Carpet Adhesive

Items Included

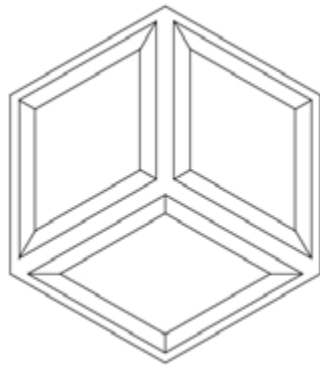

HUSH HEX tiles

1. Measure the length and height of the wall. Find center of the wall.

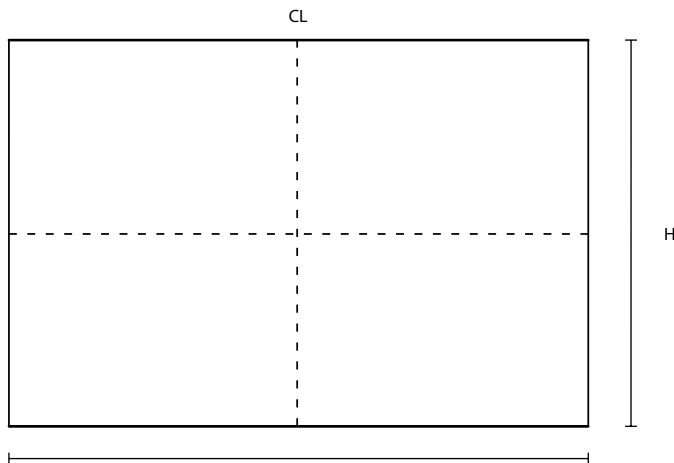


HUSHTONE™ HUSH HEX™



PET | POLYESTER ACOUSTICAL PRODUCTS

HUSH HEX™ Installation Overview


2. Lay the HUSH HEX down on the ground and flip the puffed face down.

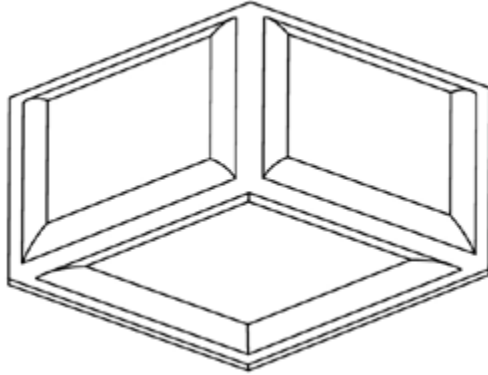

3. Use the putty knife to place the carpet adhesive to one HUSH HEX at a time. Working on one HUSH HEX at a time, apply a liberal amount of adhesive to the back of the panel utilizing the adhesive manufacturers best practices.

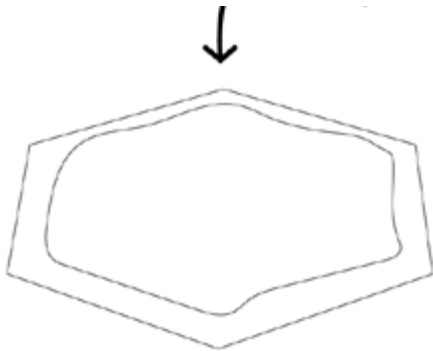


OR



*Robert 3096 Carpet Adhesive or Liquid Nails (heavy duty)

4. Position the HUSH HEX on the wall on predetermined location. Hold it until it's dry. Continue similar procedure for the rest of the HUSH HEX

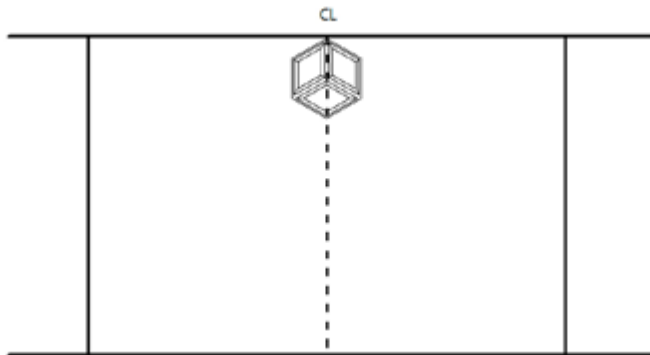

HUSHTONE™ HUSH HEX™

PET | POLYESTER ACOUSTICAL PRODUCTS

HUSH HEX™ Installation Overview

5. Complete the HUSH HEX wall installation.

