
ZEPPELIN™ BRIGHT
A CATALYST ACOUSTICS GROUP BRAND
LAMVIN®

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

SPECIFICATIONS:

STANDARD SIZES 47” Diameter Circle or 47” x 47” Square

PRODUCT WEIGHT 10 lbs

THICKNESS 2.75”

FIRE RATING:

Class A per ASTM E-84, based on 9mm white

LIGHTING SPECIFICATIONS:

LIGHT WATTAGE 56W

COLOR TEMPURATURE 3000K

LED DIMMABILITY 0-10V

LUMEN 8800


VOLTAGE 120-277V

LIGHTING HARDWARE:


Cable kit with:
(2) 6’ aircraft cable, (1) 5 wires clear power feed,
(2) white/black/silver canopy

INSTALLATION OPTIONS:

Aircraft Cable Hanging System

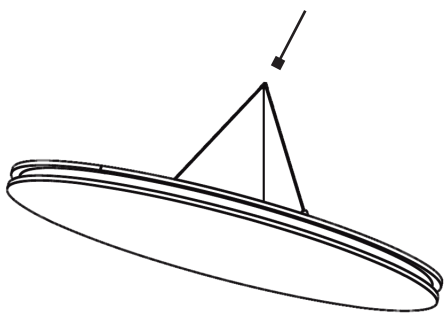

Threaded Rod Connection

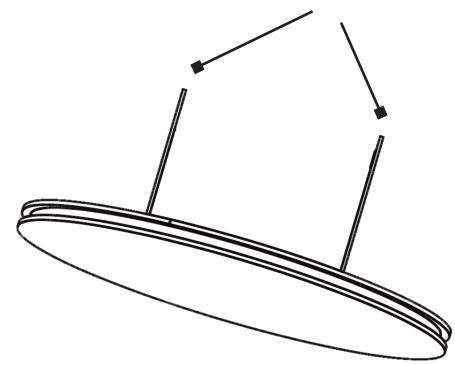

ACOUSTICAL DATA:

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
2.75” Thickness	.53	.74	1.06	1.54	1.77	1.94	**1.30**

Based on Cloud size 4’ x 4’ with Type “J” Mounting.
NRC is an equivalent number based on one face of one panel.